


AsiaSat 5G Interference Rejection Bandpass Filter Spec Sheet


Flexibility.
Excellent Performance.
Compact with High Reliability.



Mechanical Drawing

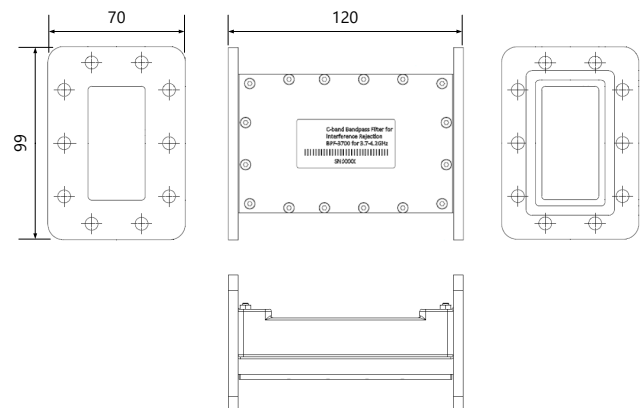

Typical Performance

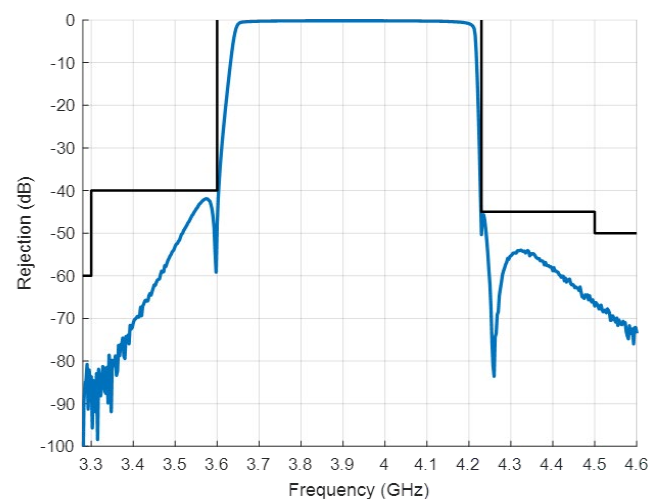

SPECIFICATIONS (BPF-4230)

Frequency range:	3700 – 4200 MHz
Return loss in pass band:	>16 dB (Typical > 22dB)
Insertion loss in pass band:	3700 – 4175 MHz < 0.55 dB 4175 – 4200 MHz < 1.0 dB
Rejection:	Below 3300 MHz > 60 dB 3300 – 3600 MHz > 40 dB 4230 – 4400 MHz > 45 dB 4400 – 4500 MHz > 45 dB 4500 – 4800 MHz > 50 dB @ 4800 MHz > 60 dB
Waveguide Flange:	WR-229G (input) WR-229F (output)
Dimensions (L x W x H):	120mm x 99mm x 70mm
Weight:	530g
Operating Temperature:	-40°C to 60°C
Environmental:	IP67
Warranty:	2 years

For more information, please contact: 5G_info@asiasat.com
AsiaSat Proprietary, 13 Jul 2020